

# Agilent U2000 Series USB Power Sensors

## Data Sheet



## Features

- ✓ Perform power measurement without a power meter
- ✓ Frequency range from 9 kHz to 24 GHz (sensor-dependent)
- ✓ Dynamic range from –60 dBm to +20 dBm
- ✓ Internal zeroing capability and external calibration-free measurements<sup>1</sup>
- ✓ Simplified measurement setup with built-in triggering function

## Introduction

The Agilent U2000 Series USB power sensors are average, dynamic wide-range power sensors that can be used with a PC or any selected Agilent USB-based instrument. With internal zeroing, there is no need to disconnect the sensor or power off the device-under-test (DUT). The U2000 Series does not require any 50 MHz reference signal calibration, thus allowing factory calibration to ensure measurement accuracy.

All the specifications provided in this data sheet are valid ONLY after proper calibration of the power sensor and apply to continuous wave (CW) signals unless otherwise stated.

The specifications are valid for a temperature range from 0 °C to +55 °C unless otherwise stated. Specifications provided for a temperature of 25 °C ± 10 °C are valid for a relative humidity range of 15% to 75% and conform to the standard environmental test conditions.

The U2000 Series USB power sensors have two independent measurement paths (high and low power paths) as shown below:


**Table 1:** Low power path and high power path for Agilent U2000 Series USB power sensors

Sensor	Power Range
U2000A, U2001A, U2002A, U2004A	–60 dBm to +20 dBm  Low Power Path: –60 dBm to –10dBm High Power Path: –10 dBm to +20 dBm


**Table 2:** Product specifications for Agilent U2000 Series USB power sensors

Model	Frequency Range	Maximum SWR (25 °C±10 °C)	Maximum SWR (0-55 °C)	Maximum Power	Connector Type
U2000A	10 MHz to 18.0 GHz	10 MHz to 30 MHz: 1.15 30 MHz to 2 GHz: 1.13 2 GHz to 14 GHz: 1.19 14 GHz to 16 GHz: 1.22 16 GHz to 18 GHz: 1.26	10 MHz to 30 MHz: 1.21 30 MHz to 2 GHz: 1.15 2 GHz to 14 GHz: 1.20 14 GHz to 16 GHz: 1.23 16 GHz to 18 GHz: 1.27	+25 dBm (320 mW) average +33 dBm peak (2 W) <10 us	Type-N (m)
U2001A	10 MHz to 6.0 GHz	10 MHz to 30 MHz: 1.15 30 MHz to 2 GHz: 1.13 2 GHz to 6 GHz: 1.19	10 MHz to 30 MHz: 1.21 30 MHz to 2 GHz: 1.15 2 GHz to 6 GHz: 1.20	+25 dBm (320 mW) average +33 dBm peak (2 W) <10 us	Type-N (m)
U2002A	50 MHz to 24 GHz	50 MHz to 2 GHz: 1.13 2 GHz to 14 GHz: 1.19 14 GHz to 16 GHz: 1.22 16 GHz to 18 GHz: 1.26 18 GHz to 24 GHz: 1.30	50 MHz to 2 GHz: 1.15 2 GHz to 14 GHz: 1.20 14 GHz to 16 GHz: 1.23 16 GHz to 18 GHz: 1.27 18 GHz to 24 GHz: 1.30	+25 dBm (320 mW) average +33 dBm peak (2 W) <10 us	3.5 mm (m)
U2004A	9 kHz to 6.0 GHz	9 kHz to 2 GHz: 1.13 2 GHz to 6 GHz: 1.19	9 kHz to 2 GHz: 1.15 2 GHz to 6 GHz: 1.20	+25 dBm (320 mW) average +33 dBm peak (2 W) <10 us	Type-N (m)


<sup>1</sup>. Users are recommended to perform external zeroing for input signals below –30 dBm to obtain a maximum degree of accuracy.

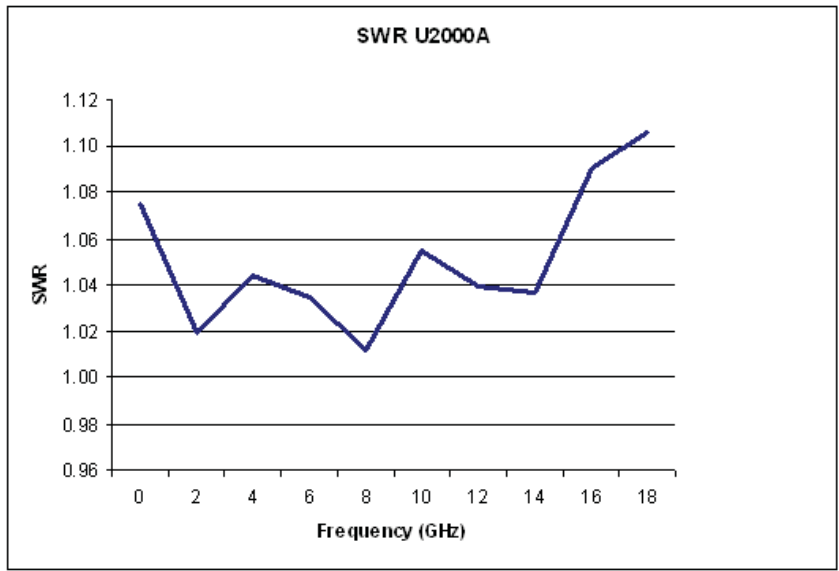


**Figure 1:** Typical SWR chart for U2000A, 10 MHz to 18 GHz (25 °C ±10 °C)

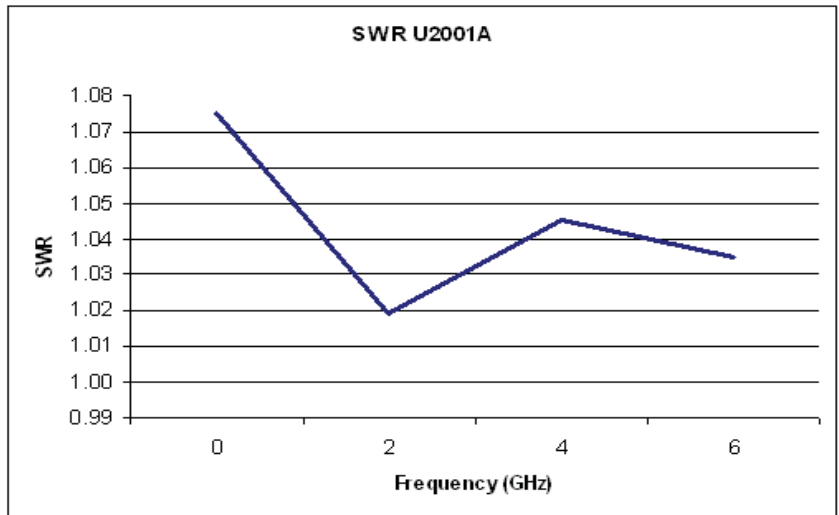

**Figure 2:** Typical SWR chart for U2001A, 10 MHz to 6 GHz (25 °C ±10 °C)

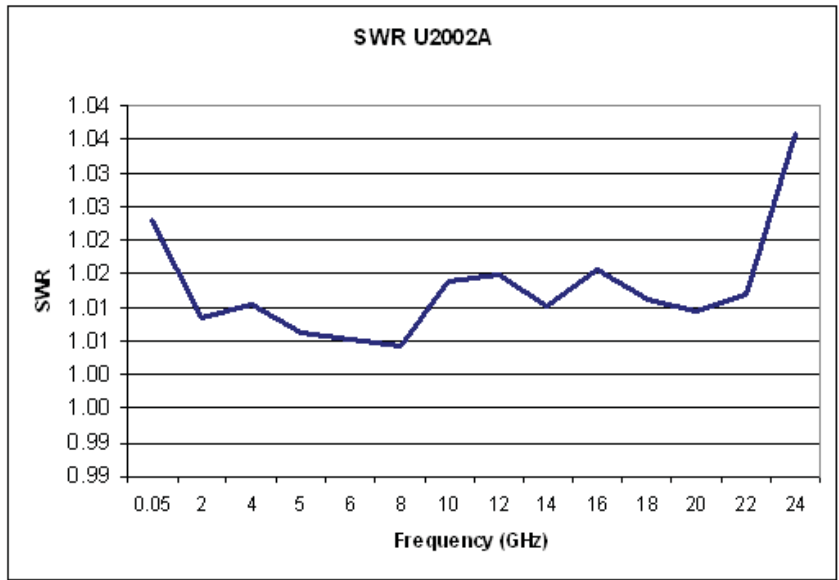

**Figure 3:** Typical SWR chart for U2002A, 50 MHz to 24 GHz (25 °C ±10 °C)

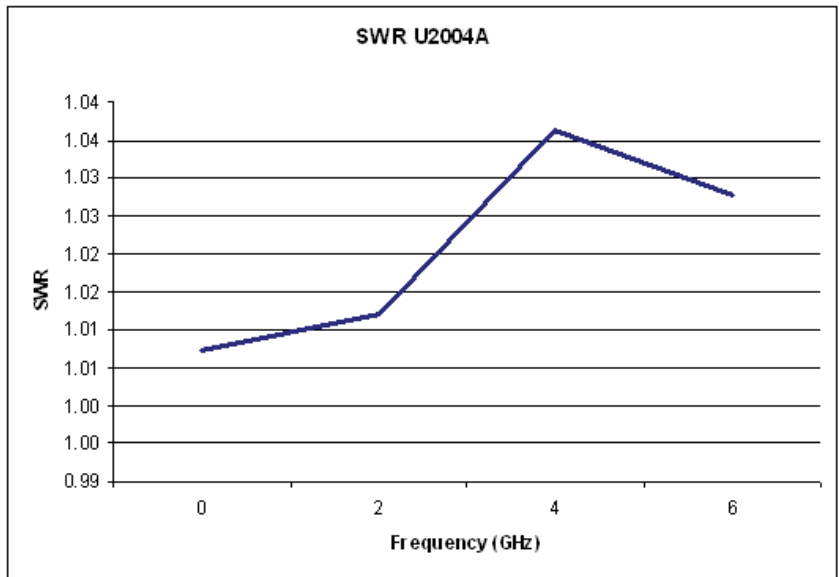


**Figure 4:** Typical SWR chart for U2001A, 9 kHz to 6 GHz (25 °C ±10 °C)

# Power Linearity

**Table 3:** Power Linearity (after zero and cal at ambient environment conditions)

Sensor	Power	Linearity (25 °C±10 °C)	Linearity (0-55 °C)
U2000A, U2001A,	-60 dBm to -10 dBm	±3.0%	±3.5%
U2002A, U2004A	-10 dBm to 0 dBm	±3.0%	±3.5%
	0 dBm to +20 dBm	±3.0%	±3.5%

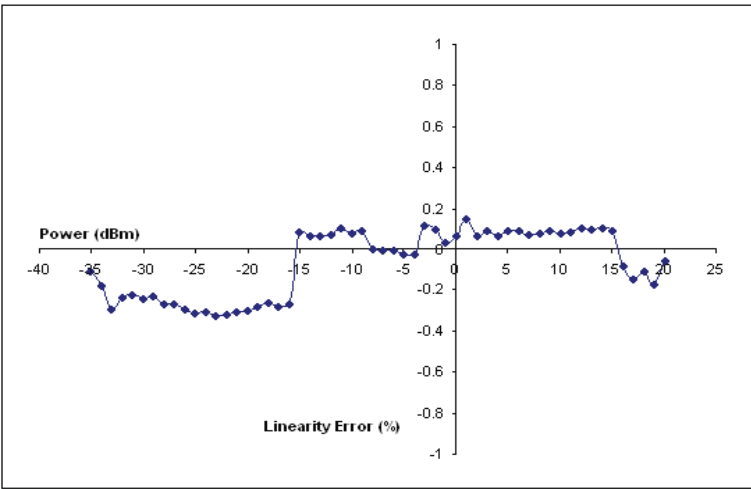

Power range	Measurement uncertainty
-60 dBm to -35 dBm	±1.52%
-38 dBm to -15 dBm	±1.52%
-20 dBm to -9 dBm	±1.69%
-11 dBm to -5 dBm	±1.69%
-7 dBm to 15 dBm	±1.96%
10 dBm to 20 dBm	±1.61%

**Figure 5:** Typical U2000 Series USB power sensors Power Linearity at 25 °C, after zero and calibration, with associated measurement uncertainty

## Switching Point

The U2000 Series USB power sensors have two paths, a low power path covering  $-60$  dBm to  $-10$  dBm, and a high power path covering  $-10$  dBm to  $+20$  dBm. The power meter automatically selects the appropriate power level path. To avoid unnecessary switching when the power level comes close to the  $-10$  dBm point, a Switching Point Hysteresis is added. This hysteresis causes the low power path to remain selected until approximately  $-9.5$  dBm has been reached. When the power level increases above  $-9.5$  dBm, the high power path will be selected. The high power path remains selected until approximately  $-10.5$  dBm has been reached. When the power level decreases below  $-10.5$  dBm, the low power path will be selected.

Switching point linearity: **Typically  $\leq \pm 0.5\%$  ( $\leq \pm 0.02$  dB)**

Switching point hysteresis: **Typically 0.5 dB**

**Table 4:** Zero Set, Zero Drift and Measurement Noise with the associated range

Range <sup>1</sup>	Zero Set	Zero Drift <sup>2</sup>	Measurement Noise <sup>3</sup>
$-60$ dBm to $-35$ dBm	$\pm 651$ pW	$996$ pW	$1.91$ nW
$-38$ dBm to $-15$ dBm	$\pm 1.13$ nW	$400$ pW	$2.24$ nW
$-20$ dBm to $-9$ dBm	$\pm 12.8$ nW	$6.01$ nW	$40.8$ nW
$-11$ dBm to $-5$ dBm	$\pm 445$ nW	$155$ nW	$1.63$ $\mu$ W
$-7$ dBm to $15$ dBm	$\pm 4.26$ $\mu$ W	$3.20$ $\mu$ W	$861$ nW
$10$ dBm to $20$ dBm	$\pm 6.84$ $\mu$ W	$3.39$ $\mu$ W	$19.5$ $\mu$ W

1. Condition: (i)  $0$  °C to  $55$  °C and (ii)  $40$  °C, 95% relative humidity.

2. Within 1 hour after zero set, at a constant temperature, after a 24 hour warm-up of the power sensor.

3. The number of averages at 16 for Normal mode, measured over one minute interval and two standard deviations.

## Settling Time

Settling Time for Normal Mode and x2 Mode

Number of Averages	1	2	4	8	16	32	64	128	256	512	1,024
Settling Time <sup>1</sup> (s) (Normal Mode)	0.045	0.09	0.17	0.34	0.66	1.3	2.6	5.2	10.4	20.9	41.9
Settling Time <sup>1</sup> (s) (x2 Mode)	0.042	0.05	0.09	0.17	0.34	0.66	1.0	2.6	5.2	10.4	20.9

Noise Multiplier for Normal Mode and x2 Mode

Number of Averages	1	2	4	8	16	32	64	128	256	512	1,024
Noise Multiplier (s) (Normal Mode)	2.0	1.8	1.7	1.5	1.0	0.95	0.74	0.55	0.39	0.29	0.21
Noise Multiplier (s) (x2 Mode)	2.7	2.4	2.0	1.6	1.0	0.91	0.78	0.53	0.34	0.29	0.20

<sup>1</sup> Manual filter, 10 dB decreasing power step (not across the switching point)

## Calibration Factor (CF) and Reflection Coefficient (Rho)

Calibration Factor (CF) and Reflection Coefficient (Rho) data is provided in the Certificate of Calibration (CoC) that comes with the purchase of U2000 Series USB power sensors. This data is unique to each sensor. If you have more than one sensor, you should match the serial number on the CoC with the serial number on the power sensor you are using. The CF corrects the frequency response of the sensor.

The Reflection Coefficient (Rho, or r) relates to the SWR based on the following formula:

$$SWR = (1 + Rho) / (1 - Rho)$$

Maximum uncertainties of the CF data are listed in the following tables.

As the U2000 Series USB power sensors have two independent measurement paths (high and low power paths), there are two calibration factor uncertainty tables for each sensor. The uncertainty analysis for the calibration of the sensors is done in accordance with the ISO Guide. The uncertainty data reported on the calibration certificate is the expanded uncertainty with a 95% confidence level and a coverage factor of two.

**Table 5:** Calibration factor uncertainties for U2000A

Frequency	U2000A	
	Uncertainty (25 °C±10 °C)	
	-60 dBm to -10 dBm	-10 dBm to 20 dBm
10 MHz to 30 MHz	± 1.70%	± 1.69%
30 MHz to 2 GHz	± 1.62%	± 1.62%
2 GHz to 14 GHz	± 1.97%	± 1.96%
14 GHz to 16 GHz	± 2.33%	± 2.33%
16 GHz to 18 GHz	± 3.09%	± 3.08%

**Table 6:** Calibration factor uncertainties for U2001A

Frequency	U2001A	
	Uncertainty (25 °C±10 °C)	
	-60 dBm to -10 dBm	-10 dBm to 20 dBm
10 MHz to 30 MHz	± 1.70%	± 1.69%
30 MHz to 2 GHz	± 1.62%	± 1.62%
2 GHz to 6 GHz	± 1.78%	± 1.75%

**Table 7:** Calibration factor uncertainties for U2002A

Frequency	U2002A	
	Uncertainty (25 °C±10 °C)	
	-60 dBm to -10 dBm	-10 dBm to 20 dBm
50 MHz to 2 GHz	± 1.98%	± 1.97%
2 GHz to 14 GHz	± 2.27%	± 2.25%
14 GHz to 16 GHz	± 2.34%	± 2.33%
16 GHz to 18 GHz	± 2.38%	± 2.37%
18 GHz to 24 GHz	± 2.73%	± 2.72%

**Table 8:** Calibration factor uncertainties for U2004A

Frequency	U2004A	
	Uncertainty (25 °C±10 °C)	
	-60 dBm to -10 dBm	-10 dBm to 20 dBm
9 kHz to 10 MHz	± 1.75%	± 1.72%
10 MHz to 30 MHz	± 1.73%	± 1.71%
30 MHz to 500 MHz	± 1.73%	± 1.71%
500 MHz to 1.2 GHz	± 1.61%	± 1.59%
1.2 GHz to 6 GHz	± 1.69%	± 1.65%

# General Characteristics

This instrument is designed for indoor use only. The table shows the general requirements for U2000 Series USB power sensors.

<b>Temperature</b>	0 °C to +55 °C (operating) -30 °C to +70 °C (non-operating)
<b>Relative Humidity</b>	Operating up to 95% at 40 °C (non-condensing) Non-operating up to 90% at 65 °C (non-condensing)
<b>Altitude</b>	Operating up to 4,600 metres (15,000 feet) Non-operating up to 4,600 metres (15,000 feet)
<b>Pollution</b>	Degree 2
<b>Net Weight</b>	U2000/1/4A : 0.262 kg (0.6 lb) U2002A : 0.226 kg (0.5 lb)
<b>Dimensions (U2000/1/4A)</b>	Length: 163.75 mm (6.4 in) Width: 46.00 mm (1.8 in) Height: 35.90 mm (1.4 in)
<b>Dimensions (U2002A)</b>	Length: 134.37 mm (5.3 in) Width: 46.00 mm (1.8 in) Height: 35.90 mm (1.4 in)
<b>Storage Environment</b>	The sensor should be stored in a clean, dry environment
<b>Storage Temperature</b>	-30 °C to +70 °C



Figure 6: Dimensional drawing of U2000 Series USB power sensors

## Features

- ✓ **Enhanced visualization with larger and more flexible display formats**
- ✓ **Powerful graph functions**
- ✓ **Display of multi-channel power measurements (with more than ten displays in one window)**
- ✓ **Convenient data logging and storage up to seven days**
- ✓ **Time-saving options to save and restore instrument settings**
- ✓ **Measurement limit and alert functions optimized for remote operation**
- ✓ **Quick and easy application screen printing option**

## Agilent N1918A Power Analysis Manager

The Agilent N1918A Power Analysis Manager is a PC-based application software running on Microsoft® Windows® platforms that is targeted to extend the capabilities of U2000 Series USB power sensors. The N1918A is a suite of software applications that comprises a basic version, which contains a standard graphical user interface (GUI), and an advanced version as an optional software license, which provides for advanced pulse analyses, multi-channel power measurements, statistical analyses, and a recording function. Users can use these software applications to track problems at any stage of their design process, from simulation to the final prototype. The software is flexible and can to accept data from multiple front ends.

The following section contains the specifications for using the Agilent N1918A Power Analysis Manager with U2000 Series USB power sensors.

### Zero and Cal:

For performing internal zeroing and calibration. No external calibration required.

### Display units:

Absolute: Watts or dBm  
Relative: Percent or dB

### Display resolution:

Resolution of 1.0, 0.1, 0.01, and 0.001 dB in log mode, or one to four digits in linear mode.

### Default resolution:

0.01 dB in log mode, three digits in linear mode.

### Range:

1 kHz to 999.9 GHz, configurable on the basis of a 1-kHz step scale.

### Relative:

Displays all successive measurements in relation to user-specific values.

### Offset:

Allows power measurements to be offset by -100 dB to +100 dB, configurable in 0.001 dB increments, to compensate for external loss or gain.

### Save and Restore Instrument Settings:

The Power Analysis Manager offers an option that allows users to save the instrument settings in \*.prop format files. This enables users to restore their instrument settings by simply loading the relevant instrument property files whenever the same settings are required.

### dBm/W:

Selectable units of either Watts or dBm in absolute power; or percentage of dB for relative measurements.

### Duty cycle:

Duty cycle values between 0.001% to 99.999% can be entered in increments of 0.01% to display a pulse power representation of measured power. The following equation is used to calculate the display pulse power value:

### Pulse Power

$$= \text{Measured Power} / \text{Duty Cycle}$$

### Limits:

High and low limits can be set in the range between -150.00 dBm to +230.000 dBm, in 0.001 dBm increments.

### Preset default values:

Channel Offset (dB) = 0  
Duty Cycle: Off  
Frequency: 50 MHz  
AUTO Average  
AUTO Range  
Free Run Mode  
Measurement Unit: dBm

### Measurement speed:

- 110 readings/sec in FAST mode
- 250 readings/sec in buffered mode of 50 readings

### Current requirement:

Approximately 200 mA maximum current for USB



## Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)

Get the latest information on the products and applications you select.



## Agilent Direct

[www.agilent.com/find/agilentdirect](http://www.agilent.com/find/agilentdirect)

Quickly choose and use your test equipment solutions with confidence.



[www.agilent.com/find/open](http://www.agilent.com/find/open)

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

Microsoft and Windows are registered trademarks of Microsoft Corporation in the United States and/or other countries.

## Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to

[www.agilent.com/find/removealldoubt](http://www.agilent.com/find/removealldoubt)

## www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Phone or Fax

**United States:**  
(tel) 800 829 4444  
(fax) 800 829 4433

**Canada:**  
(tel) 877 894 4414  
(fax) 800 746 4866

**China:**  
(tel) 800 810 0189  
(fax) 800 820 2116

**Europe:**  
(tel) 31 20 547 2111

**Japan:**  
(tel) (81) 426 56 7832  
(fax) (81) 426 56 7840

**Korea:**  
(tel) (080) 769 0800  
(fax) (080) 769 0900

**Latin America:**  
(tel) (305) 269 7500

**Taiwan:**  
(tel) 0800 047 866  
(fax) 0800 286 331

**Other Asia Pacific Countries:**  
(tel) (65) 6375 8100  
(fax) (65) 6755 0042  
Email: [tm\\_ap@agilent.com](mailto:tm_ap@agilent.com)  
Revised: 1%/06

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2007  
Printed in USA, August 29, 2007  
5989-6278EN



Agilent Technologies